


BALT[®]

E.EAZY-6030



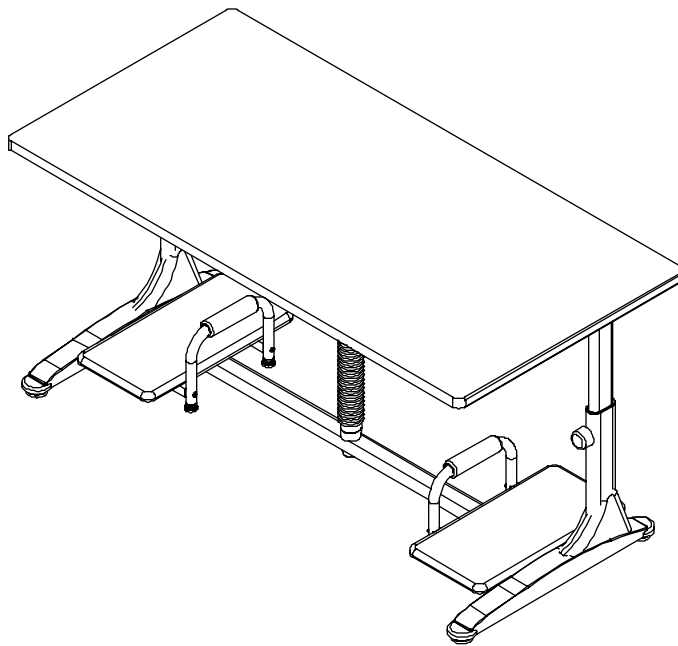






























Adjustable Pneumatic Computer Desk

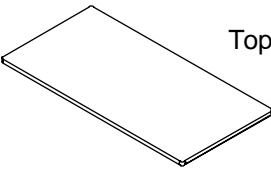

Assembly Instructions

E.EAZY-6030

Computer Desk

Part	Drawing	Description	Qty	Part	Drawing	Description	Qty																																								
P1		Top Platform	1 EA	P10		Cable Management Tray	2 EA																																								
P2		Upper Leg Insert	2 EA	<div style="border: 2px solid black; border-radius: 15px; padding: 10px;"> <h3>Hardware List</h3> <table border="0"> <tr> <td>A</td> <td></td> <td>Screw 6MM x 13</td> <td>14 EA</td> </tr> <tr> <td>A1</td> <td></td> <td>Screw 6MM x 40</td> <td>12 EA</td> </tr> <tr> <td>A2</td> <td></td> <td>Screw 8MM x 40</td> <td>4 EA</td> </tr> <tr> <td>B</td> <td></td> <td>Flat Washer</td> <td>4 EA</td> </tr> <tr> <td>C</td> <td></td> <td>Cylinder w/Plastic cover</td> <td>1 EA</td> </tr> <tr> <td>D</td> <td></td> <td>Adjustment Knob</td> <td>2 EA</td> </tr> <tr> <td>E</td> <td></td> <td>Desk Glide</td> <td>4 EA</td> </tr> <tr> <td>F</td> <td></td> <td>Large CPU Glide</td> <td>4 EA</td> </tr> <tr> <td>G</td> <td></td> <td>Small CPU Glide</td> <td>4 EA</td> </tr> <tr> <td>H</td> <td></td> <td>Allen Wrench</td> <td>1 EA</td> </tr> </table> <p><i>We recommend that you assemble this unit on a table.</i></p> </div>				A		Screw 6MM x 13	14 EA	A1		Screw 6MM x 40	12 EA	A2		Screw 8MM x 40	4 EA	B		Flat Washer	4 EA	C		Cylinder w/Plastic cover	1 EA	D		Adjustment Knob	2 EA	E		Desk Glide	4 EA	F		Large CPU Glide	4 EA	G		Small CPU Glide	4 EA	H		Allen Wrench	1 EA
A		Screw 6MM x 13	14 EA																																												
A1		Screw 6MM x 40	12 EA																																												
A2		Screw 8MM x 40	4 EA																																												
B		Flat Washer	4 EA																																												
C		Cylinder w/Plastic cover	1 EA																																												
D		Adjustment Knob	2 EA																																												
E		Desk Glide	4 EA																																												
F		Large CPU Glide	4 EA																																												
G		Small CPU Glide	4 EA																																												
H		Allen Wrench	1 EA																																												


E.Eazy-6030 Assembly Diagram



To Assemble:


1. Identify and Separate all the Parts and Hardware.
2. Place the Top Platform (P-1) with the insert nuts facing up. Attach 2 each Upper Leg Inserts (P-2) to the Top Platform (P-1) using 4 (A) Screws as shown in illustration #1.
(Do not tighten screws all the way)
3. Attach Height Adjust Bracket (P-5) to the Top Platform (P-1) using 4 (A) Screws as shown in illustration #1.
(Do not tighten screws all the way)

Illustration # 1

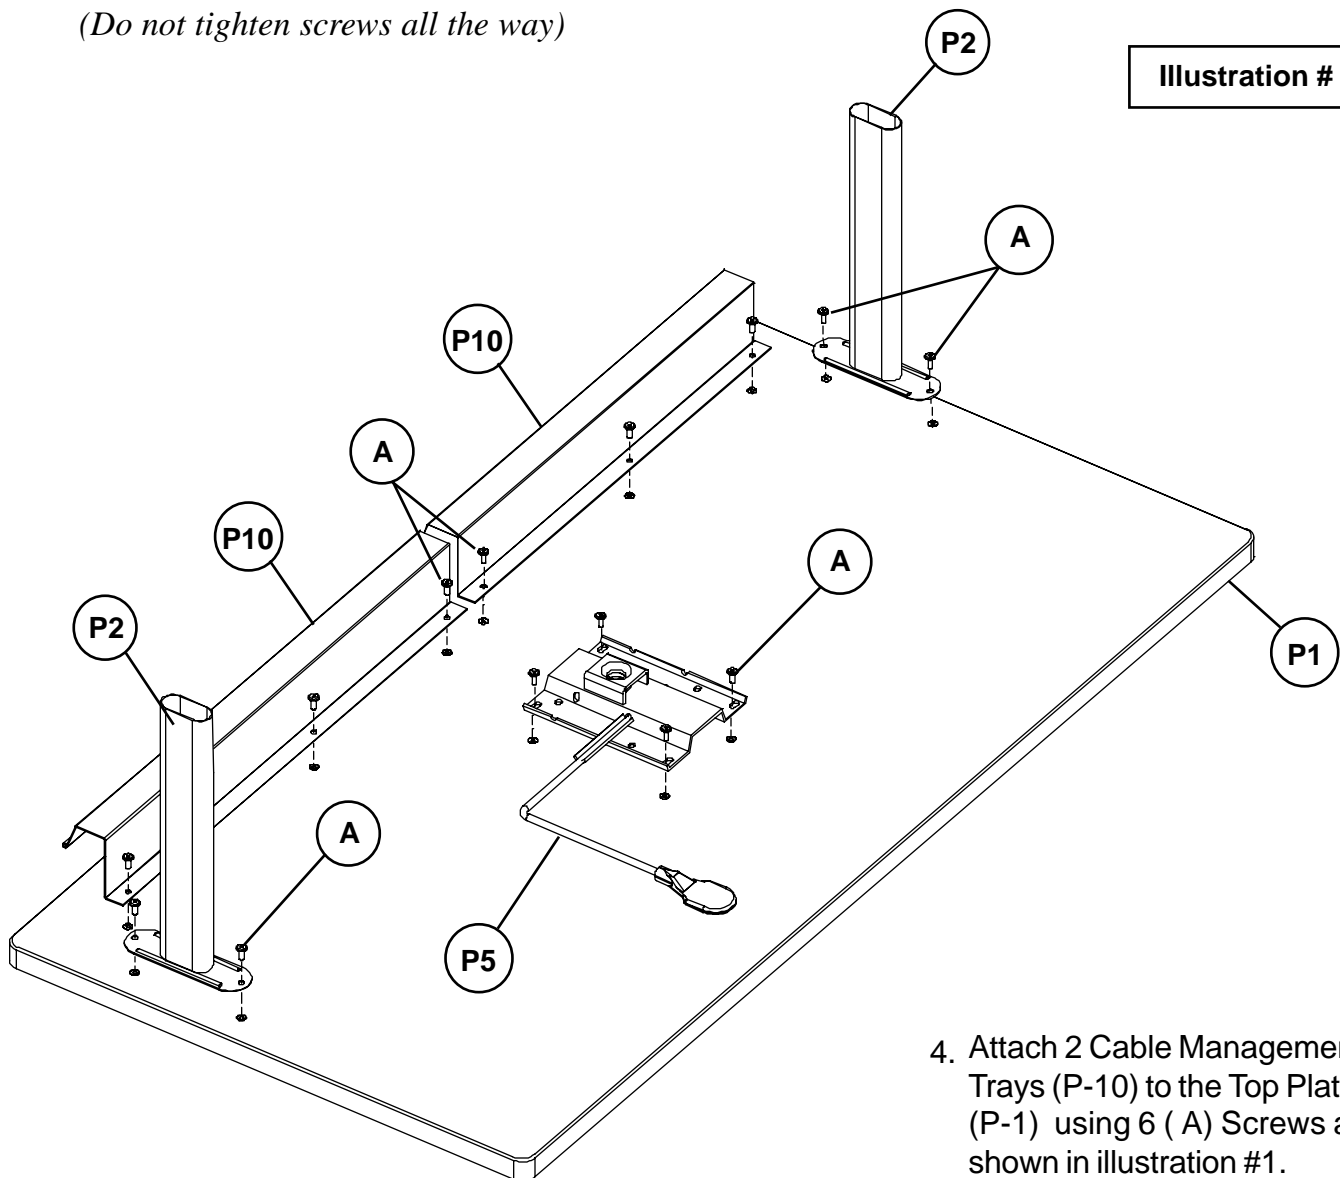

4. Attach 2 Cable Management Trays (P-10) to the Top Platform (P-1) using 6 (A) Screws as shown in illustration #1.

Illustration # 2

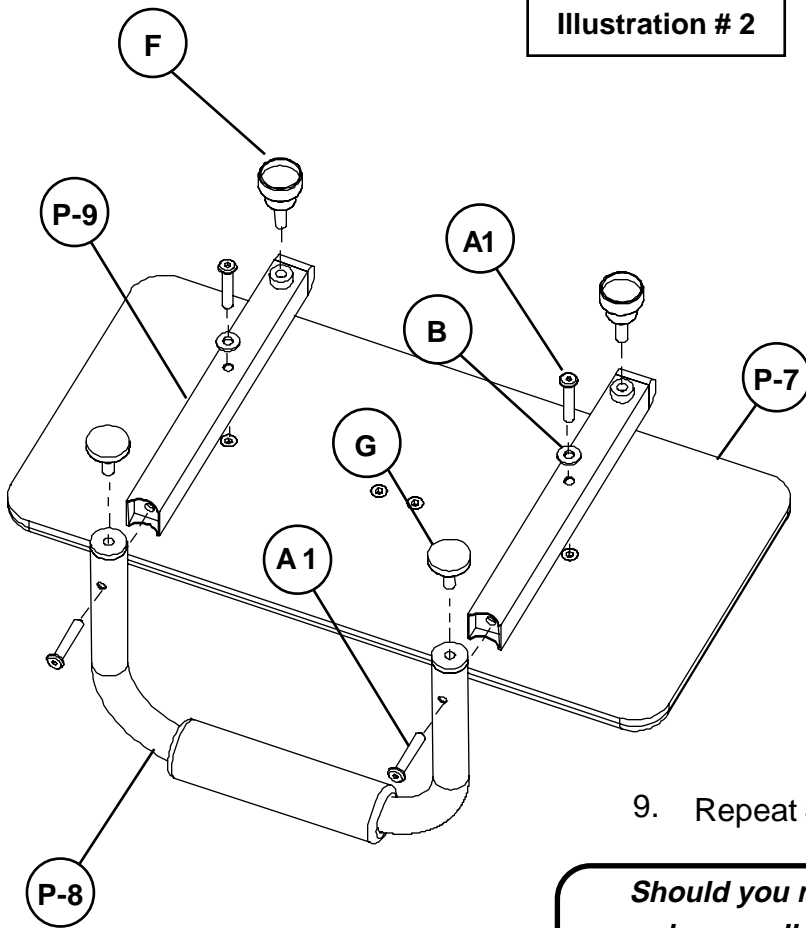

5. Attach 2 each CPU Feet (P-9) to the CPU Platform (P-7) using 2 each Screws (A1) and 2 each washers (B) as shown in illustration #2.
6. Attach 1 each CPU Support Leg (P-8) to the 2 each CPU Feet (P-9) using 2 Screws (A1) as shown in illustration #2.
7. Insert 2 each large CPU Glides (F) into the 2 each CPU Feet (P-9) as shown in illustration #2.
8. Insert 2 each small CPU Glides (G) into the bottom of 1 each CPU Support Leg (P-8) as shown in illustration #2.
9. Repeat Steps 5 thru 8 for 2nd CPU Platform

***Should you require assistance during assembly,
please call our Customer Service Department
Monday - Friday 8 a.m. - 5 p.m. Central Standard Time
Toll-Free Customer Service
1-800-749-2258***

10. Attach 1 each Right Leg Receiver (P-3) and 1 each Left Leg Receiver (P-4) to the Leg Brace(P-6) using 4 (A2) Screws as shown in illustration #3. *(Do not tighten screws all the way)*
11. Insert 4 each Desk Glides (E) as shown in illustration #3.

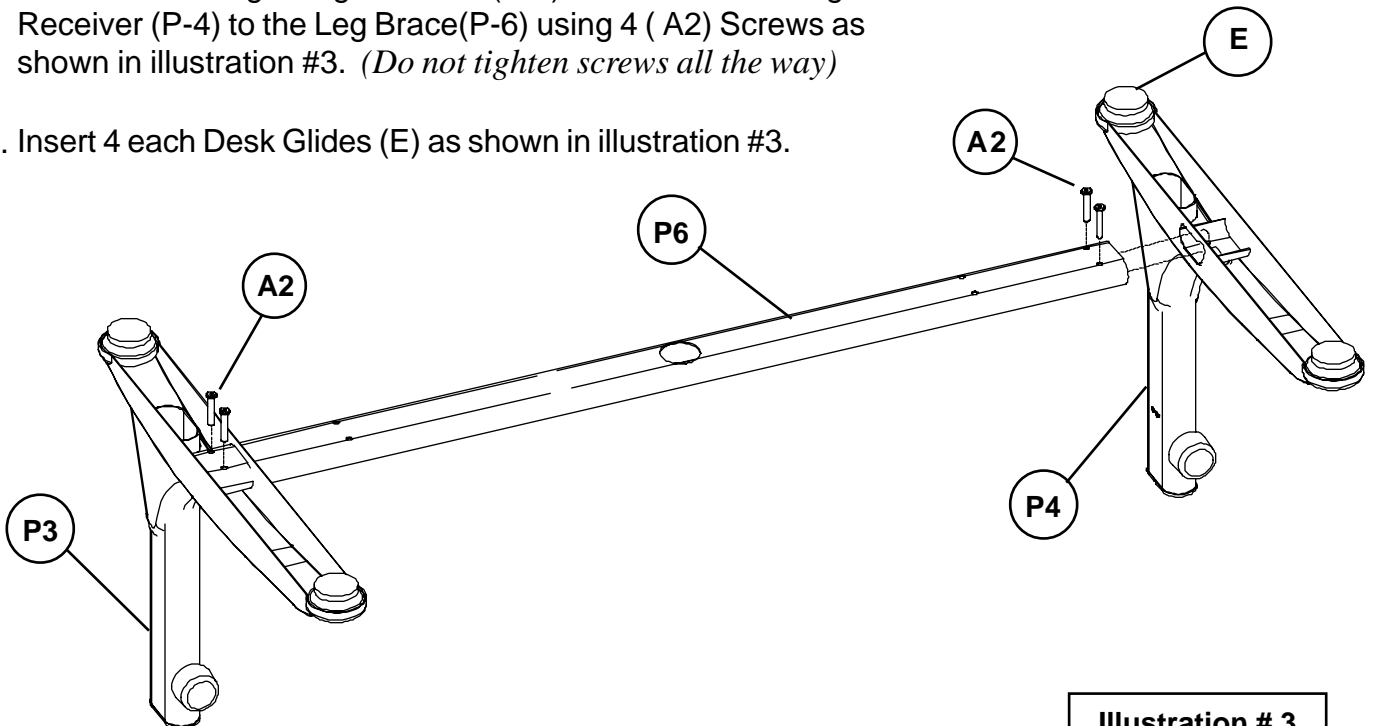



Illustration # 3

Height Adjustment

To raise height of unit, loosen both adjustment knobs (D) and press handle on height adjustment bracket(P-5) upward toward top. The pneumatic cylinder will begin lifting the unit, and you can release handle at the desired height. Secure unit at desired height by tightening both adjustment knobs (D).

To lower height of unit, loosen both adjustment knobs (D) and press handle on height adjustment bracket upward toward top. Press on center of Top Platform using body weight. Top Platform will lower and you can release handle at the desired height. Secure unit at desired height by tightening both adjustment knobs (D).

12. Insert Cylinder w/Plastic Cover (C) into Height Adjust Bracket (P-5) as shown in illustration #4.
13. Slide Lower Leg Assembly over the Upper Leg Inserts (P-2) shown in illustration #4. (Make sure cylinder base slides into hole in Leg Brace (P-6) as shown in illustration #4.)
14. Attach CPU Assembly to the Leg Brace (P-6) using 2 each Screws (A1) and 2 each washers (B) as shown in illustration #4. (*Tighten all screws.*)
15. Tighten 2 each Height Adjustment Knobs (D) before turning unit upright.

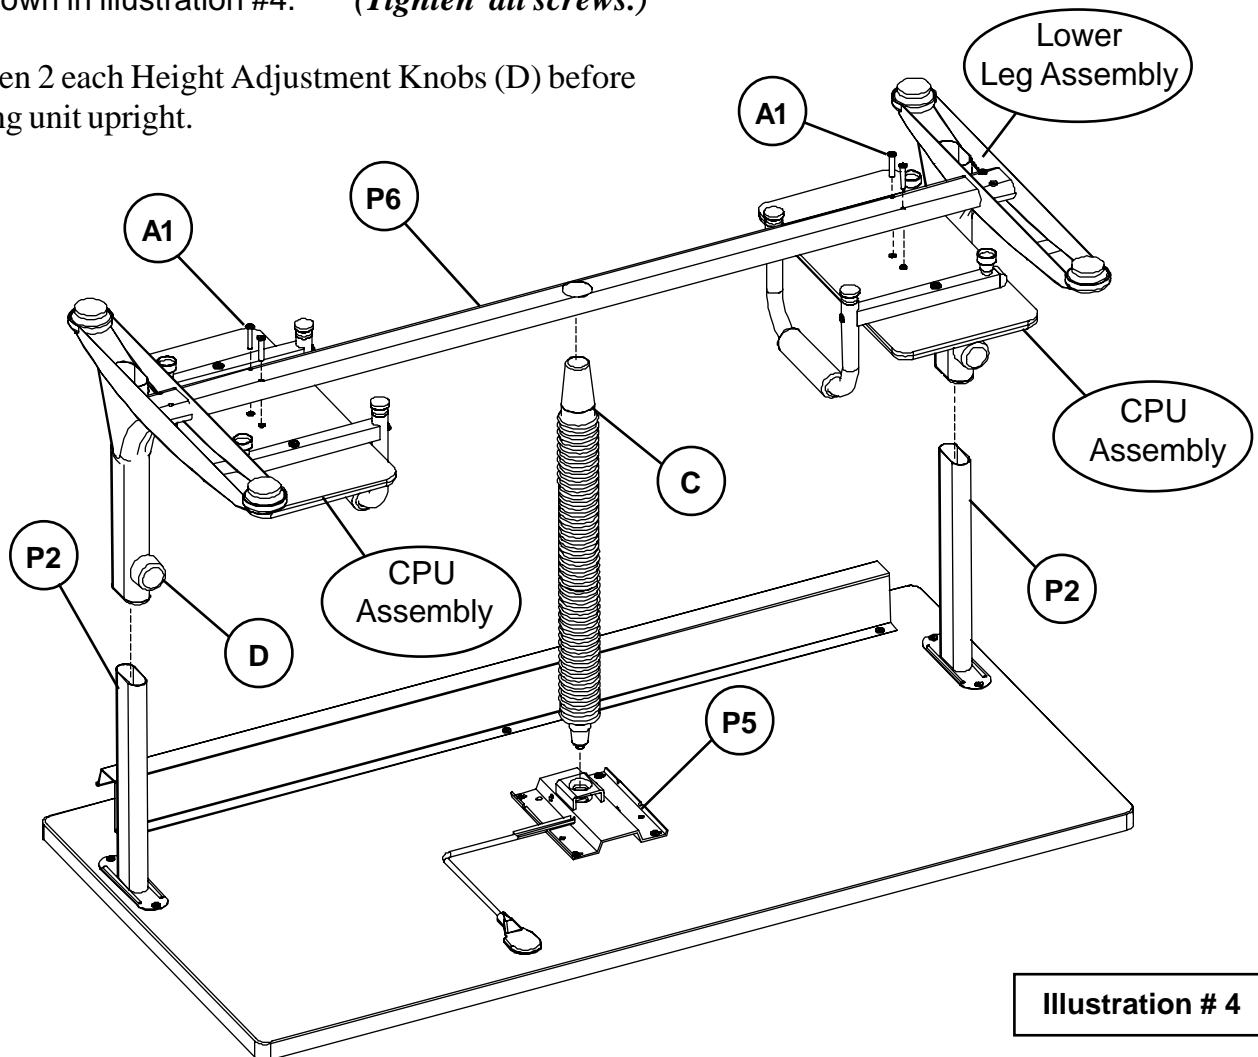

Missing Parts or UPS Damaged Parts
For Your Convenience you can
EMAIL us at
susanthompson@baltinc.com
24HOURS 7 DAYS A WEEK

Do not use unless all screws are tight. At least every six months, check all screws to be sure they are tight. If parts are missing, broken, damaged, or worn, stop use of the product until repairs are made by your dealer using factory authorized parts.